



IYM

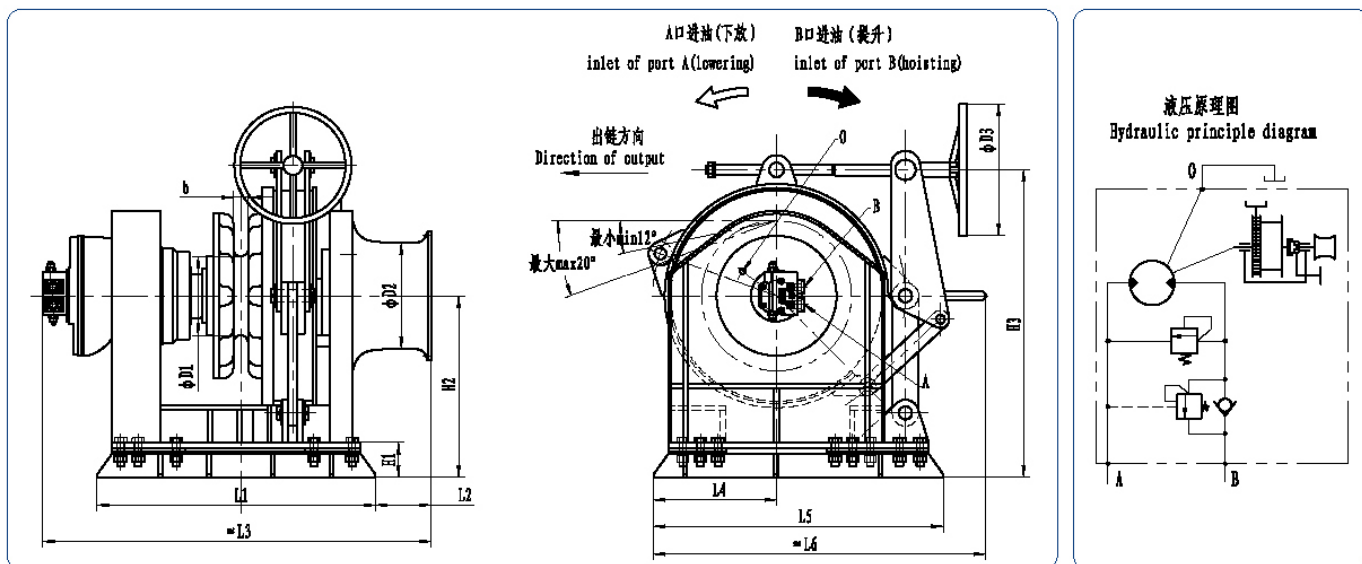

型号 model	工作负载 working load (KN)	过载拉力 overload pull (KN)	支持负载 holding load (KN)	起锚速度 nominal speed of windlass (m/min)	抛锚深度 anchorage (m)	总排量 Total displacement (mL/r)	工作压力 Rated Pressure (mL/r)	供油流量 Supply oil flow (L/min)	锚链直径 chain diameter (mm)
IYM2.5-φ16	10.9	16.4	>67	>9	<82.5	860.5	16	20	16
IYM2.5-φ17.5	13	19.5	>80	>9	<82.5	1050.5	15	14	17.5
IYM3-φ22	20.6	30.9	>126	>9	<82.5	3107.5	15	31	22
IYM4-φ30	38.3	57.5	>231	>9	<82.5	6580	14	46	30

型号 model	φ D1 (mm)	φ D2 (mm)	φ D3 (mm)	b (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	L5 (mm)	L6 (mm)	H1 (mm)	H2 (mm)	H3 (mm)	O	A, B
IYM2.5-φ16	144	200	250	28	570	196	895	220	515	620	90	335	550	G1/4"	M22x1.5
IYM2.5-φ17.5	157	200	250	31	570	196	895	220	515	620	90	335	550	G1/4"	M22x1.5
IYM3-φ22	198	300	280	39	705	182	1052	280	645	750	115	425	694	G1/2"	M22x1.5
IYM4-φ30	270	360	450	51	950	191	1327	420	990	1050	120	620	1050	G1/2"	φ 35


● IYM

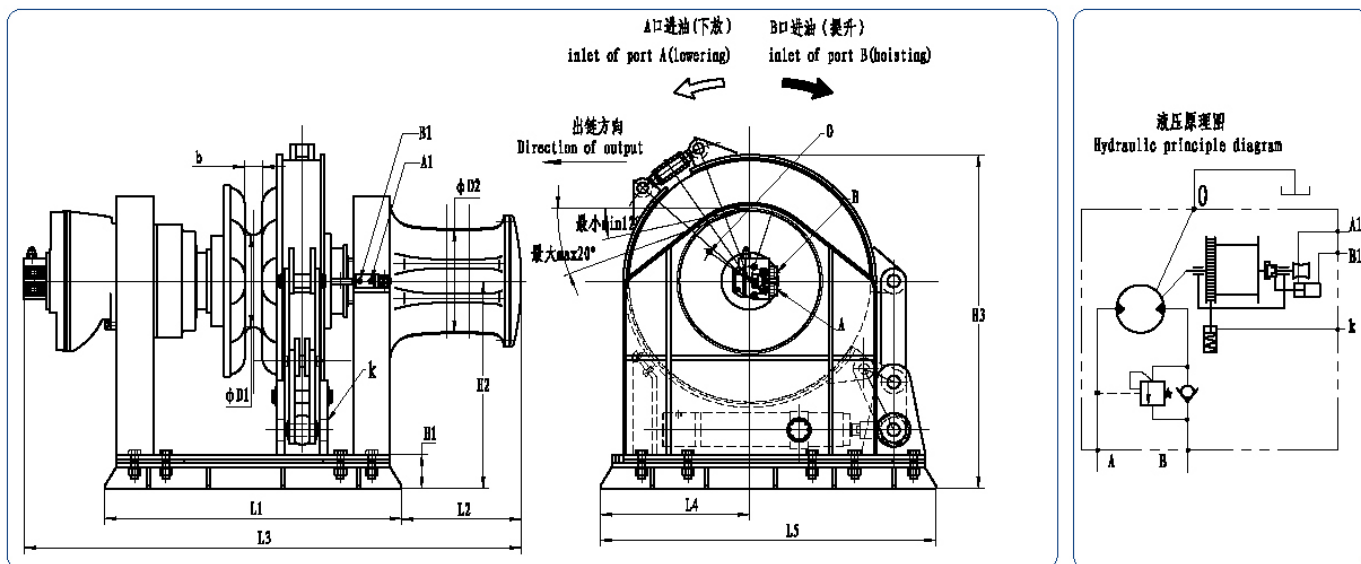


型号 model	工作负载 working load (KN)	过载拉力 overload pull (KN)	支持负载 holding load (KN)	起锚速度 nominal speed of windlass (m/min)	抛锚深度 anchorage (m)	总排量 Total displacement (mL/r)	工作压力 Rated Pressure (mL/r)	供油流量 Supply oil flow (L/min)	锚链直径 chain diameter (mm)
IYM4- $\phi 32$	43.5	65.3	>261	>9	<82.5	8170	12.5	53	32
IYM4- $\phi 34$	49.1	73.7	>294	>9	<82.5	8987	12.5	55	34
IYM5- $\phi 36$	55.1	82.7	>329	>9	<82.5	10035	14	60	36
IYM5- $\phi 38$	61.1	92.1	>365	>9	<82.5	12560	14	70	38
IYM6- $\phi 40$	68	102	>402	>9	<82.5	13821.5	14	72	40
IYM6- $\phi 42$	75	112.5	>442	>9	<82.5	16725.5	14	83	42

型号 model	$\phi 1$ (mm)	$\phi 2$ (mm)	b (mm)	$L1$ (mm)	$L2$ (mm)	$L3$ (mm)	$L4$ (mm)	$L5$ (mm)	$H1$ (mm)	$H2$ (mm)	$H3$ (mm)	K	A1、B1	0	A、B
IYM4- $\phi 32$	288	350	54	932	264	1470	460	1040	120	640	1022	M22x1.5	M14x1.5	G1/2"	$\phi 35$
IYM4- $\phi 34$	306	360	58	936	264	1474	460	1040	120	640	1022	M22x1.5	M14x1.5	G1/2"	$\phi 35$
IYM5- $\phi 36$	325	360	61	1045	421	1748	525	1180	120	730	1180	M22x1.5	M14x1.5	G1/2"	$\phi 35$
IYM5- $\phi 38$	342	360	64	1050	421	1805	525	1180	120	730	1180	M22x1.5	M14x1.5	G1/2"	$\phi 35$
IYM6- $\phi 40$	360	430	67	1091	421	1850	605	1350	120	805	1330	M22x1.5	M14x1.5	G1/2"	$\phi 35$
IYM6- $\phi 42$	378	430	70	1094	421	1853	605	1350	120	805	1330	M22x1.5	M14x1.5	G1/2"	$\phi 35$

● IYM8-2x $\phi 22 \times 6$


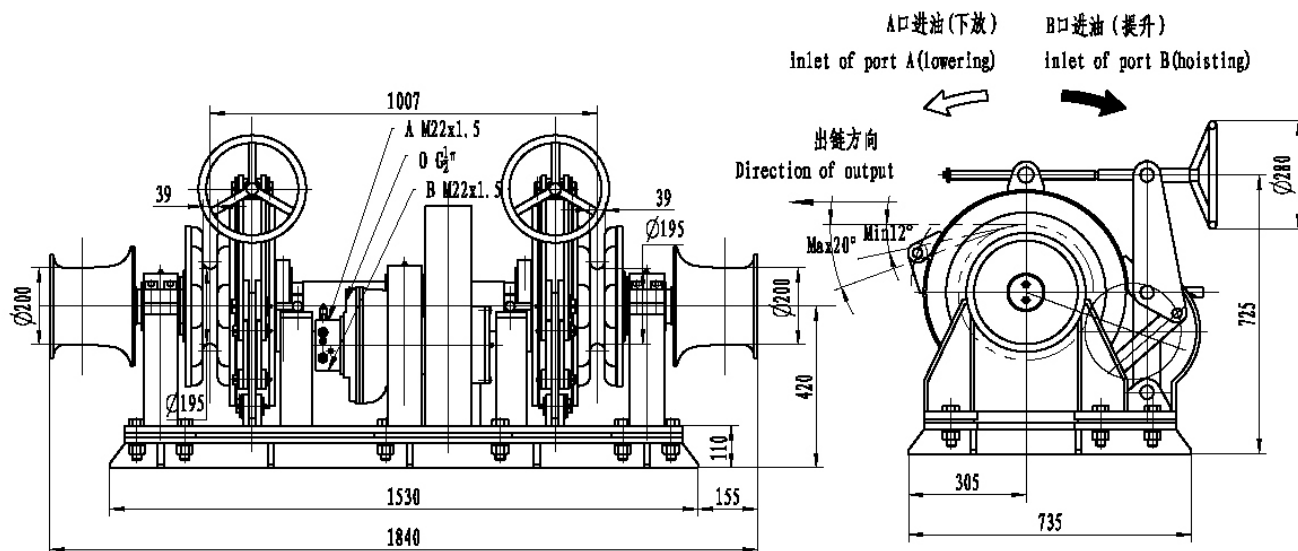


液压原理图
Hydraulic principle diagram

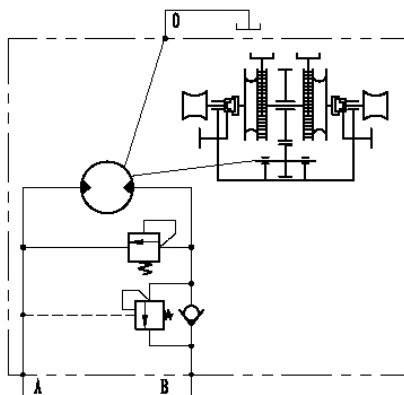

型号 model	工作负载 working load (KN)	过载拉力 overload pull (KN)	支持负载 holding load (KN)	起锚速度 nominal speed of windlass (m/min)	抛锚深度 anchorage (m)	总排量 Total displacement (mL/r)	工作压力 Rated Pressure (mL/r)	供油流量 Supply oil flow (L/min)	锚链直径 chain diameter (mm)
IYM8-2x $\phi 22 \times 6$	20.6	30.9	>126	>9	≤82.5	1938	17	31	22

● IYM ϕ 36

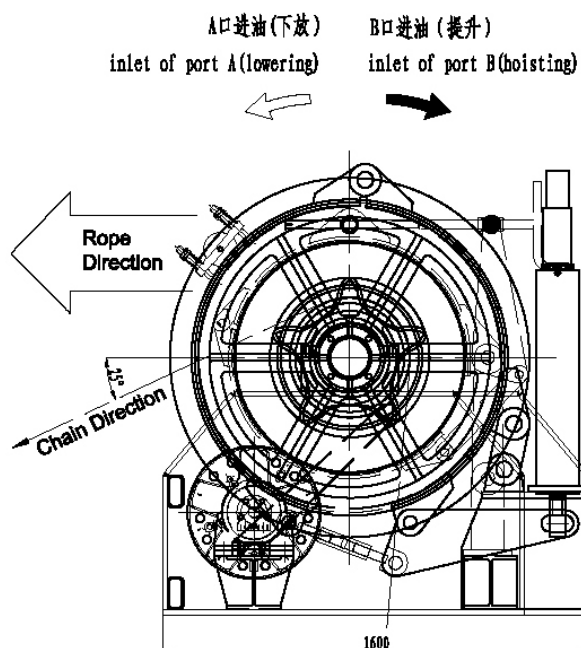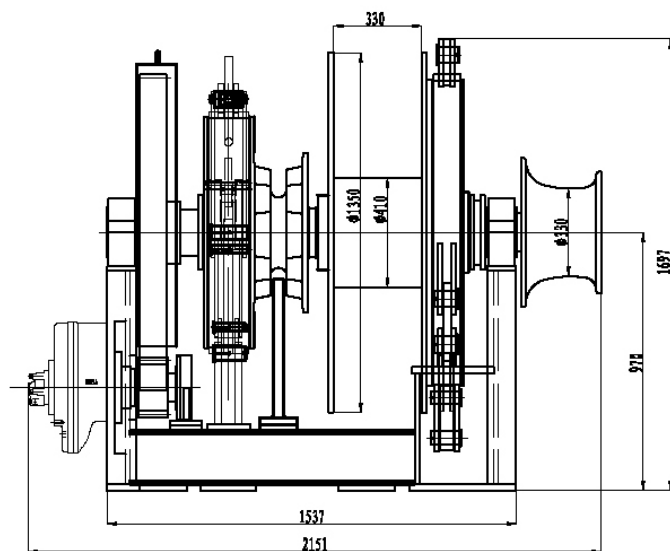

锚链主要技术参数

chain main Specification

额定负载 Rate Load(kN)	100
功率 Power(Kw)	20
支撑负载 Hold On Load(kN)	340
锚链速度 Chain Speed(m/min)	12
锚链直径 Chain Diameter(mm)	36
额定压力 Rated Pressure(MPa)	20
液压马达型号 Hydraulic Motor Type	GM5-1600

绞车主要技术参数

Winch main Specification

第一层拉力 Rated working pull 1st layer(kN)	100
第一层绳速 Speed 1st layer(m/min)	15
系统压力 System rated pressure(MPa)	20
钢丝绳直径 Diameter of rope(mm)	36
层数 Number of rope layers	100
容绳量 Capability of drum(m)	220
供油流量 Pump flow(L/min)	100($\eta v=0.9$)